




6" Round Cylinder Surface, Cable or Stem Mount New Construction / Non-IC

Date: _____
Project: _____
Type: _____
Cat. #: _____

PRODUCT IMAGES



Standard Dimensions:

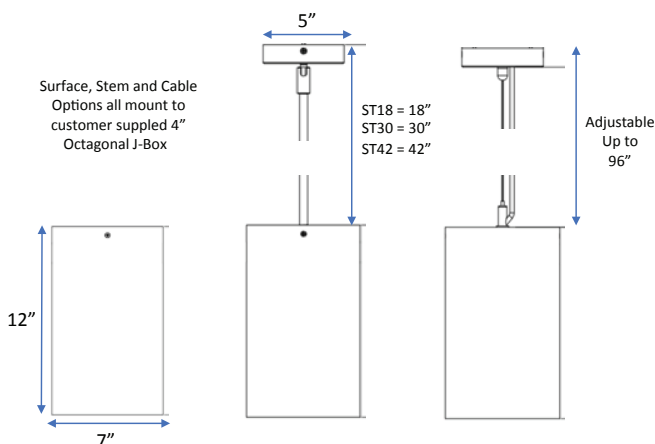

SPECIFICATIONS

Applications:

- New Construction or Retrofit Cylinder used for Commercial or Architectural applications.
- Suitable for ambient temperatures up to 35C (95F) with free airflow around fixture.

Key Dimensions

- Aperture – 6.25"
- Height – 12"
- Diameter – 7.1"
- Mounts to 4" Octagonal J Box

Construction:

- Cylinder body is powder coated extruded aluminum.
- Light Engine and Driver are easily accessible for serviceability

Optical System:

- Aluminum Reflector with Semi-Diffuse Anodized Finish
- 80+ CRI / 3 SDCM Color Consistency
- 70% Lumen Maintenance at 50,000+ Hours
- 80 to 100 Lumens Per Watt
- Field Configurable Kelvin Temperature to 30K, 35K or 40K
- Lensed Wall Wash Option Available

Electrical:

- 120 thru 277v 50/60hz Input Power
- <20% THD; PF > 0.9
- EMI FCC 47CFR Part 15, Class A
- Standard 0-10v dimming to 10%, , 1% dimming available,
- Driver Sources up to 2ma of current to the dimming circuit
- FCC Part15, Class A

Certifications:

- UL Listed for Damp Locations

Battery Back-Up:

- EM Option supplied with a pre-wired 6watt, self-diagnostic, LED battery that is UL Listed for field installation. Test switch is supplied pre-installed inside of the reflector. Not suitable for use with the Wall Wash option.

Warranty:

- Standard 5 Year Limited Warranty
- See www.heliosltg.com/warranty for Details.

ORDERING INFORMATION


ORDERING EXAMPLE: C6R15L35KWHTST18

C6R						
Aperture	Output	Kelvin	Cylinder Color	Function	Dimming	Mounting
C6R - 6" Round Cylinder	10L - 1000 lumens	30K - 3000 Kelvin	WHT - White Paint	Blank - Downlight	Blank - 10%, 0-10V Dimming	SURF - Surface
C6REM - 6" Round Cylinder with integral battery back up and test switch.	15L - 1500 lumens	35K - 3500 Kelvin	BLK - Black Paint	WW- Lens Wall Wash	DM1- 1%, 0-10V Dimming	ST18 - 18" Stem
	20L - 2000 lumens	40K - 4000 Kelvin				ST30 - 30" Stem
	25L - 2500 lumens					CBLE - 96" Adjustable Cable w/ Cord
	30L - 3000 lumens					

PHOTOMETRICS - 10L

Fixture: **C6R10L35KWHT SURF**
LED: 3500Kelvin, 80+ CRI

Delivered Lumens: 975
System Wattage: 9.6
System LPW: 102
Spacing Criteria: 1.1

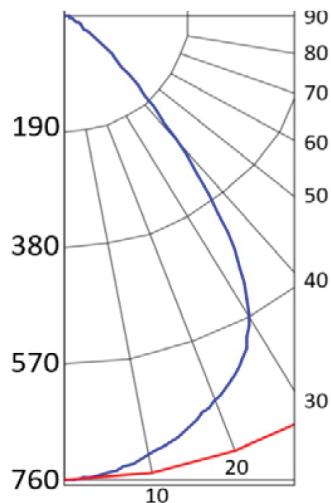

Degrees	Candela	Zonal Lumens		
		Zone	Total	% Luminaire
0	758			
10	730	71	71	7.3%
20	670	198	269	27.6%
30	563	290	559	57.3%
40	264	264	823	84.4%
50	73	113	936	96.0%
60	12	30	966	99.1%
70	4	7	973	99.8%
80	1	2	975	100.0%
90	0	0	975	100.0%

Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.403


Test Date: 2019-01-16

Tested in accordance to IESNA LM-79-2008

PHOTOMETRICS - 15L

Fixture: **C6R15L35KWHT SURF**
LED: 3500Kelvin, 80+ CRI

Delivered Lumens: 1463
System Wattage: 14.9
System LPW: 98
Spacing Criteria: 1.1

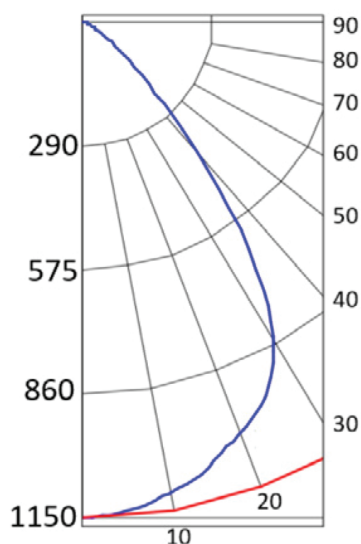

Degrees	Candela	Zonal Lumens		
		Zone	Total	% Luminaire
0	1148			
10	1108	108	108	7.4%
20	1017	301	409	28.0%
30	845	437	846	57.8%
40	389	392	1238	84.6%
50	107	166	1404	96.0%
60	19	44	1448	99.0%
70	6	11	1459	99.7%
80	9	4	1463	100.0%
90	0	0	1463	100.0%

Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.403


Test Date: 2019-01-16

Tested in accordance to IESNA LM-79-2008

PHOTOMETRICS - 20L

Fixture: **C6R20L35KWHT SURF**
LED: 3500Kelvin, 80+ CRI

Delivered Lumens: 1903
System Wattage: 17.2
System LPW: 111
Spacing Criteria: 1.1

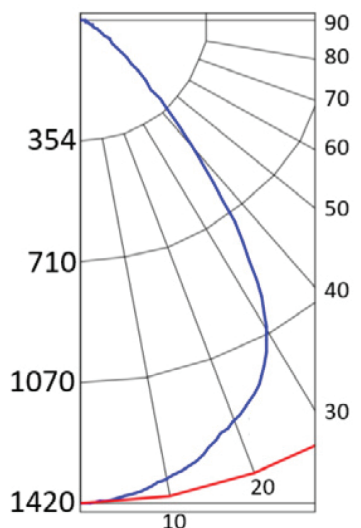

Degrees	Candela	Zonal Lumens		
		Zone	Total	% Luminaire
0	1417			
10	1398	109	109	5.7%
20	1290	316	425	22.4%
30	1090	653	1078	56.7%
40	560	465	1543	81.2%
50	140	246	1789	94.1%
60	24	92	1881	98.9%
70	8	13	1894	99.6%
80	3	5	1899	99.9%
90	0	2	1901	100.0%

Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.403


Test Date: 2019-01-16

Tested in accordance to IESNA LM-79-2008

PHOTOMETRICS - 25L

Fixture: **C6R25L35KWHT SURF**
LED: 3500Kelvin, 80+ CRI

Delivered Lumens: 2455
System Wattage: 25.5
System LPW: 96
Spacing Criteria: 1.1

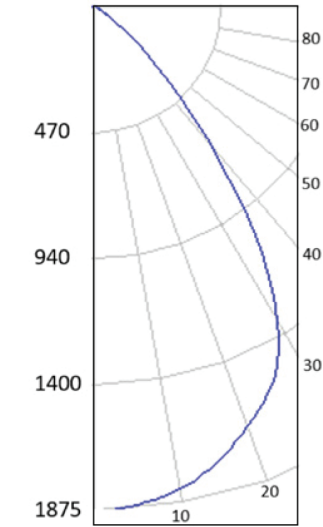


Degrees	Candela	Zonal Lumens		
		Zone	Total	% Luminaire
0	1874			
10	1823	177	177	7.2%
20	1662	494	671	27.3%
30	1357	707	1378	56.1%
40	667	637	2015	82.1%
50	201	301	2316	94.3%
60	49	93	2409	98.1%
70	18	31	2440	99.4%
80	6	12	2452	99.9%
90	0	3	2455	100.0%

Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.403
Test Date: 2019-06-17
Tested in accordance to IESNA LM-79-2008

PHOTOMETRICS - 30L

Fixture: **C6R30L35KWHT SURF**
LED: 3500Kelvin, 80+ CRI

Delivered Lumens: 2897
System Wattage: 31.1
System LPW: 93.1
Spacing Criteria: 1.1

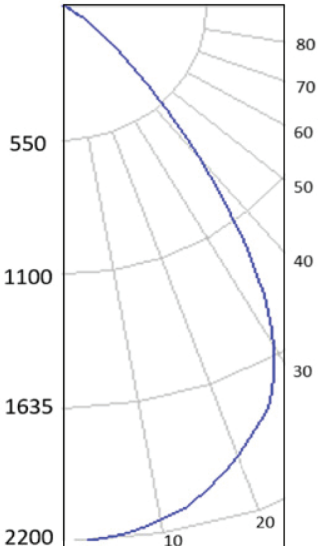

Degrees	Candela	Zonal Lumens		
		Zone	Total	% Luminaire
0	2178			
10	2125	206	206	7.1%
20	1945	577	783	27.0%
30	1602	830	1613	55.7%
40	802	758	2371	81.8%
50	242	362	2733	94.3%
60	57	111	2844	98.2%
70	21	35	2879	99.4%
80	7	14	2893	99.9%
90	0	4	2897	100.0%

Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.403
Test Date: 2019-06-17
Tested in accordance to IESNA LM-79-2008