


PRODUCT IMAGES

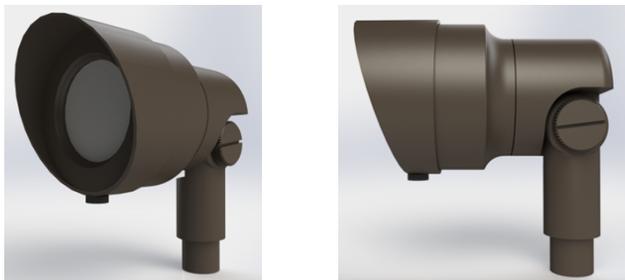

Features:

- Professional grade die cast aluminum construction with powder coat finish for exceptional durability
- High quality optics available in various lumen outputs and beam angles for superior illumination
- Fully sealed housing designed to prevent water ingress with IP66 rating
- Advanced Voltage Surge Suppression for protection from lightning strikes
- Toolless adjustment of cowl and installation angle

Performance:

Output	300 Lumen	450 Lumen
Color Temperature	3000K	3000K
Input Voltage	9-15VAC	9-15VAC
VA	4.1VA	6.1VA
Wattage	3W	3W
Input Current	0.6A@12.1VAC	0.6A@12.1VAC
Efficacy (LM/W)	46	46
Power Factor	0.7	0.7
Halogen Replacement	50W	50W

Environmental:

Environmental Protection Rating	IP66 Wet
Ambient Operating Range	-25°C to 40°C
Storage Temperature Range	-40°C to +80°C
Expected Life	50K Hours > 75°C Tc Max
Certifications	ETL


Included Accessories:

- Adjustable Cowl (Accepts 1 additional filter media)
- 40" Lead Wire and direct burial gel filled wire nuts
- Installation Stake

Warranty:

- Standard 5 Year Warranty
- See www.lumenscapeltg.com/warranty for details.

Standard Dimensions:

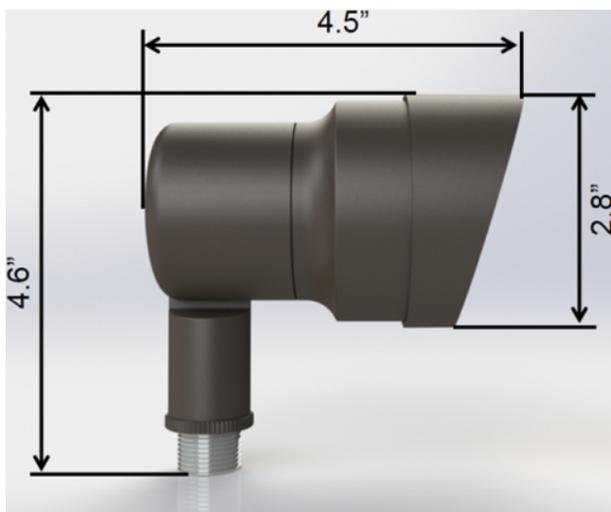

- Stem angle adjustment from 0° to 90°

ORDERING INFORMATION

ORDERING EXAMPLE: AC30LSP15ABZ

Fixture	Output	Beam	Finish
AC Accent Light	30L 300 Lumens 45L 450 Lumens	SP15 15 Degree Spot Optic MD35 35 Degree Medium Optic FL60 60 Degree Flood Optic	ABZ Aged Bronze