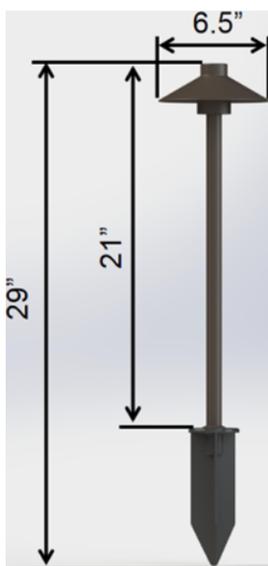


**PRODUCT IMAGES**

**CP1 (Traditional)**

**CP2 (Hemisphere)**

**CP3 (Two Tier)**

**CP4 (Sparkle)**
**Standard Dimensions:**

**Features:**

- Professional grade die cast aluminum construction with powder coat finish for exceptional durability
- Riser with integrated LED light engine provides 230 lumens
- Interchangeable decorative caps for design and installation flexibility
- Fully sealed light engine designed to prevent water ingress with IP66 rating
- Advanced Voltage Surge Suppression for protection from lightning strikes

**Performance:**

Light Source	Integrated LED
Lumens	230
Color Temperature	3000K
Input Voltage	9-15VAC
VA	7.5VA
Wattage	5W
Input Current	0.6A@12.1VAC
Efficacy (LM/W)	46
Power Factor	0.7
Halogen Replacement	50W

**Environmental:**

Environmental Protection Rating	IP66 Wet
Ambient Operating Range	-25°C to 40°C
Storage Temperature Range	-40°C to +80°C
Expected Life	50K Hours > 75°C Tc Max
Certifications	ETL

**Included Accessories:**

- 40" Lead Wire and direct burial gel filled wire nuts
- Installation Stake

**Warranty:**

- Standard 5 Year Warranty
- See [www.lumenscapeltg.com/warranty](http://www.lumenscapeltg.com/warranty) for details.

**ORDERING INFORMATION**

ORDERING EXAMPLE: PA25LCP1ABZ

Fixture	Output	Cap	Finish
PA Path Light	25L 250 Lumens	CP1 Traditional Cap Design	ABZ Aged Bronze
		CP2 Hemisphere Cap Design	
		CP3 Two Level Cap Design	
		CP4 Sparkle Cap Design	