



PRODUCT IMAGES

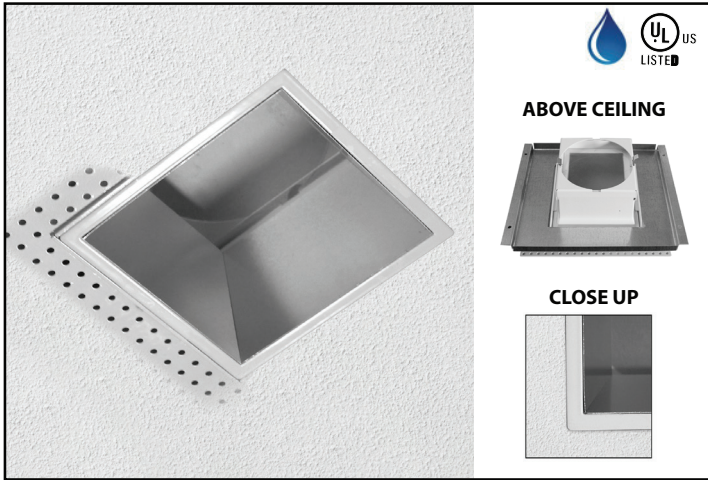

Standard Dimensions:

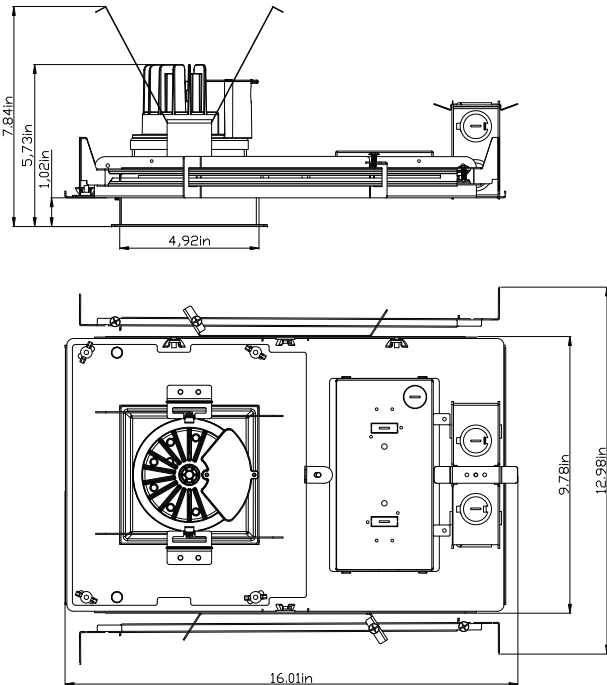

SPECIFICATIONS

Applications:

- New Construction Recessed Downlight suitable for Commercial and Architectural Applications.
- Suitable for ambient temperatures up to 35C (95F) with free airflow around fixture.

Key Dimensions

- Aperture – 4.375"
- Ceiling Cutout – 4.875"

Construction:

- Galvanized Steel New Construction Housing
- Telescoping Bar Hangers Included (up to 24" grid)
- Light Engine and Driver Can Extend below the ceiling for ease of accessibility
- Adjust of up to 7 degrees (each direction) rotationally for proper square alignment

Optical System:

- Self Flanged Aluminum Reflector with Semi-Diffuse Anodized Finish
- 90+ CRI Option
- Dim To Warm Option from 3000K to 2000K
- 70% Lumen Maintenance at 50,000+ Hours
- Lensed Wall Wash Option Available, may be orientated in 90 degree increments to housing

Electrical:

- 120 thru 277v 50/60hz Input Power
- <20% THD; PF > 0.9
- EMI FCC 47CFR Part 15, Class A
- Standard 0-10v dimming to 10%, 1% dimming available,
- Driver Sources up to 2ma of current to the dimming circuit
- FCC Part15, Class A

Certifications:

- UL listed for:
 - Wet Location under covered ceilings with Downlight Option

Battery Back Up

- EMR option supplied with a pre-wired 7watt LED battery that is UL Listed for Field Installation. Remote Test Switch included.

Warranty:

- Standard 5 Year Limited Warranty
- See www.heliosltg.com/warranty for Details.

See Page 3 for additional dimensioned Line Art

ORDERING INFORMATION

ORDERING EXAMPLE: 4S15L35KAN

Aperture	Output	Kelvin	Reflector	Function	Dimming	Emergency
4S - 4" Square	10L - 1000 lumens	30K9 - 90+ CRI	FMAN - Semi-Diffuse Anodized	Blank - Downlight	Blank - 10%, 0-10V	Blank - No Battery
	15L - 1500 lumens	35K9 - 90+ CRI	Cone and Flush Mount Flange	WW- Lens Wall Wash	DM1 - 1%, 0-10V	EMR - Battery Back Up with Remote Test Switch
	20L - 2000 lumens	40K9 - 90+ CRI	FMWH - White Cone and Flush			GTD - Generator Transfer Device, 0-10v compatible
	25L - 2500 lumens	30/20DTW - 3000K to 2000K Dim To Warm	Mount Flange			

Housing and Reflector Ship Separately

Due to our continued efforts to improve our products, product specifications are subject to change without notice.